



Technical Sciences  
Academy of Romania  
www.jesi.astr.ro

## Journal of Engineering Sciences and Innovation

Volume 8, Issue 1 / 2023, pp. 93-100

<http://doi.org/10.56958/jesi.2023.8.1.93>

**F. Electrical, Electronics Engineering,  
Computer Sciences and Engineering**

Received 22 October 2022

Accepted 24 March 2023

Received in revised form 12 February 2023

### Providing the electricity need of a house with photovoltaic panels: Kütahya case study

OGUZ OZAN YOLCAN\*, RAMAZAN KOSE

*Kutahya Dumlupınar University, Engineering Faculty, Mech. Eng. Dept.  
Kutahya/TURKEY*

**Abstract.** In this study, a techno-economic analysis of meeting the electricity need of a house from photovoltaic panels in the Central district of Kütahya was made. In order to meet the electricity needs of the house, a 3.6 kW<sub>p</sub> Off-Grid system was considered, and polycrystalline and monocrystalline panel technologies were evaluated separately. For both panel technologies, theoretical production values were calculated by using meteorological data of Kütahya province. As a result of this; The annual theoretical electricity production value of the monocrystalline system was 7832 kWh, and the annual theoretical electricity production value of the polycrystalline system was 5324 kWh. In addition, the cost analysis of the systems was carried out and the payback periods were calculated as 3.45 years for the monocrystalline system and 3.38 years for the polycrystalline system.

**Keywords:** Solar energy, photovoltaic, techno-economic analysis.

#### 1. Introduction

Renewable energy usage rates are increasing day by day in Turkey and in the world. In Table 1, electricity energy production according to Turkey, Europe and World sources between the years 2019-2021 is seen [1], [2]. Electricity generation from renewable energy sources increased from 43.3 TWh to 62.7 TWh in Turkey from 2019 to 2021. In Europe, it increased from 840 TWh to 946.5 TWh. In the world, it increased from 2789.2 TWh to 3657.2 TWh.

---

\*Correspondence address: oguzozan.yolcan@dpu.edu.tr

Table Eroare! În document nu există text cu stilul precizat.. Electricity generation in Turkey, Europe and the World in 2019-2021 according to sources (TWh) [1], [2].

2019									
	Oil	Natural gas	Coal	Nuclear	Hydro	Other	Renewable	Total	Renewable (%)
<b>Turkey</b>	0.3	57.3	112.9	-	88.8	1.2	43.3	303.9	14.25
<b>Europe</b>	53.6	774.2	689.5	930.0	627.9	76.9	840.0	3992.1	21.04
<b>World</b>	820.5	6323.8	9826.2	2796.6	4227.9	216.7	2789.2	27001.0	10.33
2020									
	Oil	Natural gas	Coal	Nuclear	Hydro	Other	Renewable	Total	Renewable (%)
<b>Turkey</b>	0.3	70.9	105.8	-	78.1	-	51.5	306.7	16.8
<b>Europe</b>	48.9	765.4	569.7	833.2	657.9	81.1	922.7	3879.0	23.79
<b>World</b>	661.7	6371.7	9439.3	2694.0	4346.0	230.0	3146.6	26889.2	11.7
2021									
	Oil	Natural gas	Coal	Nuclear	Hydro	Other	Renewable	Total	Renewable (%)
<b>Turkey</b>	0.3	110.4	104.2	-	55.7	-	62.7	333.3	18.81
<b>Europe</b>	47.9	799.3	632.0	882.8	649.7	74.2	946.5	4032.5	23.47
<b>World</b>	720.3	6518.5	10244.0	2800.3	4273.8	252.2	3657.2	28466.3	12.85

The licensed installed capacity of Turkey for the years 2018-2020 is shown in Table 2, and the unlicensed installed capacity is shown in Table 3 [3]. While the licensed solar energy installed power in Turkey was 81.66 MW in 2018, it reached 409.8 MW by the end of 2020. While the unlicensed solar installed power was 5017 MW at the end of 2018, it increased to approximately 6257.6 MW at the end of 2020.

Table 2. Turkey's licensed electrical energy installed capacity for the years 2018-2020 (MW) [3].

Source	2018	Share (%)	2019	Share (%)	2020	Share (%)
Natural gas	25731.93	30.93	25935.41	30.53	25639.26	28.8
Hydro	20534.80	24.69	20642.51	24.30	22925.03	25.7
Lignite	9597.12	11.54	10101.03	11.89	10119.92	11.4
Imported coal	8938.85	10.75	8966.85	10.55	8986.85	10.1
Coal	616.15	0.74	810.77	0.95	810.77	0.9
Asphaltite coal	405	0.49	405.00	0.48	405.0	0.5
Fuel oil	709.21	0.85	305.93	0.36	305.93	0.3
Naphtha	4.74	0.01	4.74	0.01	4.74	0.0
Lng	1.95	0.00	1.95	0.00	1.95	0.0
Diesel	1.04	0.00	1.04	0.00	1.04	0.0
Biomass	590.92	0.71	725.92	0.85	1031.88	1.2
Stream	7748.90	9.32	7851.85	9.24	8050.23	9.0
Wind	6942.27	8.35	7520.33	8.85	8761.57	9.8
Geothermal	1282.52	1.54	1514.69	1.78	1613.19	1.8
<b>Solar</b>	<b>81.66</b>	<b>0.10</b>	<b>169.70</b>	<b>0.20</b>	<b>409.8</b>	<b>0.5</b>
<b>Total</b>	<b>83187.05</b>	<b>100.00</b>	<b>84957.72</b>	<b>100.00</b>	<b>89067.14</b>	<b>100.00</b>

Table 3. Turkey's 2018-2020 unlicensed electrical energy installed capacity (MW) [3].

Source	2018		2019		2020	
	Inst. Power	Share (%)	Inst. Power	Share (%)	Inst. Power	Share (%)
<b>Solar</b>	<b>5016.99</b>	<b>94.47</b>	<b>5825.46</b>	<b>92.33</b>	<b>6257.61</b>	<b>91.71</b>
Natural gas	153.04	2.88	328.66	5.21	402.67	5.90
Biomass	79.18	1.49	75.67	1.20	83.71	1.23
Wind	51.95	0.98	70.83	1.12	70.83	1.04
Hydro	8.91	0.17	8.65	0.14	8.65	0.13
<b>Total</b>	<b>5310.57</b>	<b>100.00</b>	<b>6309.27</b>	<b>100.00</b>	<b>6823.47</b>	<b>100.00</b>

In this study, meeting the electricity need of a house in the Central district of Kütahya province with photovoltaic panels was investigated. There are studies in the literature about the use of photovoltaic panels in residences.

Yi et al. evaluated the use of photovoltaic in residential buildings depending on electricity cost, demand fulfillment and carbon emissions and suggested an optimum photovoltaic usage strategy [4]. Hyvönen et al. investigated energy storage methods together with the use of photovoltaic in residential buildings. The study was evaluated in terms of Scandinavian climatic conditions [5]. Domingos and Pereira evaluated the use of photovoltaic in houses in terms of energy efficiency and cost. Within the scope of the study, 576 different models were discussed. Payback periods, Net Present Values and Internal Rates of Return of the evaluated models were calculated [6]. Muhammad-Sukki et al. evaluated the use of photovoltaic in residential buildings in Malaysia. Within the scope of the study, state policies and the socio-economic status of the public's use of photovoltaic were emphasized [7]. Kijo-Kleczkowska et al. have made a techno-economic evaluation of the use of photovoltaics in combination with a heat pump in residential buildings. A cost analysis was carried out for an example in Poland [8].

Karaca and Uçar investigated the use of photovoltaic in houses and evaluated the effect of the surface on which the photovoltaic panels will be placed on the performance of the photovoltaic panel [9]. Çifci et al. evaluated the issue of meeting the electricity need of a house from photovoltaic panels in the province of Burdur. In the cost analysis, the payback period of the system was determined as 11 years [10]. Adalı and Yalılı Kılıç researched meeting the electricity need of a house in Bursa with a hybrid renewable energy system. Cost analysis was carried out by considering two separate systems, independent of the grid and connected to the grid. The net present value for the off-grid system is approximately \$9160, and the net present value for the grid-connected system is approximately \$1367 [11]. Öztürk et al. investigated the use of photovoltaic in residential buildings and performed a cost analysis for off-grid and grid-connected systems. As a result of the calculations, the lifetime cost for the off-grid system is 0.67\$/kWh, and the lifetime cost for the grid-connected system is 0.4\$/kWh [12]. Yalılı Kılıç et al. investigated the use of photovoltaic in residences in Bursa and Karaman provinces. The payback period of the systems is calculated as approximately 7 years [13]. Güngül et al. investigated the use of photovoltaic in houses and used the TOPSIS

method to determine the optimum system. Cost tables of 6 different companies were prepared for system installation and optimum system selection was determined by TOPSIS method [14]. In her study, Kutlu researched meeting the electricity need of a house in Isparta province with photovoltaic panels. Techno-economic analysis of the system that can be established has been carried out [15].

## 2. Material and method

The representation of Kütahya on the map of Turkey is given in Figure 1 [16]. Within the scope of this study, a techno-economic analysis of meeting the electricity need of a house from photovoltaic panels in the Merkez district of Kütahya was made. A 3.6 kW<sub>p</sub> system has been considered in order to meet the electricity needs of the house.

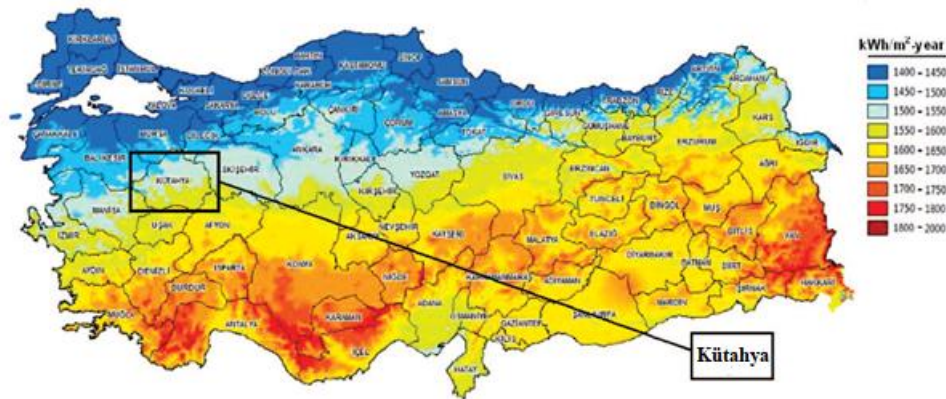


Fig. 1. Location of Kütahya province in Turkey [16].

In order to calculate the theoretical production values of the system, meteorological data of Kütahya province obtained from Meteorological Data Information Sales and Presentation System (MEVBIS) were used [17].

Table 4. Parametric properties of photovoltaic cells [18].

	Unit	c-Si	p-Si
Efficiency	STC, %	23	16
Temp. Coeff.	$\beta$	0.41	0.43
T <sub>NOCT</sub>	°C	47	45
System balance losses	%	8	8
Dust factor	%	5	5

In order to determine the instantaneous efficiency of photovoltaic panels, the following assumptions are taken into account for measurements made under Standard Test Conditions [18];

Acceptances under standard test conditions;

Ambient temperature,  $T_{amb,NOCT}=20$  °C,

PV cell temperature,  $T_{NOCT}$ , (Table 4)

Temperature coefficient,  $\beta$  (%°C), (Table 4)

Depending on the photovoltaic cell temperature, the instantaneous efficiency of the photovoltaic panel is calculated by Equation 1 [18];

$$\eta_{PV} = \eta_{STC} - \beta(T_c - T_{NOCT}) \quad (1)$$

Annual production amounts of photovoltaic power plants are calculated with Equation 2 [18];

$$E_A = \sum_1^{365} A_{PV} \cdot H_T \cdot \eta_{PV} \cdot (1 - \lambda_{PV}) \cdot (1 - \lambda_C) \quad (2)$$

In this equation;  $A_{PV}$  refers to the total photovoltaic module area,  $H_T$  refers to the daily amount of solar radiation coming to the panel surface,  $\lambda_{PV}$  refers to the losses due to dusting,  $\lambda_C$  refers to other system losses.

Photovoltaic panel cell temperature is calculated by Equation 3 [19];

$$T_c = 3,4631 + T_{amb} + 0,029345 \cdot G - 0,0051 \cdot G \cdot V_w + 0,00027035 \cdot G \cdot V_w^2 - 2,8467 \cdot V_w + 0,55022 \cdot V_w^2 - 0,0293 \cdot V_w^3 \quad (3)$$

In this expression;  $T_c$  is the cell temperature in °C,  $T_{amb}$  is the ambient temperature in °C,  $G$  is the solar radiation in  $W/m^2$ ,  $V_w$  is the wind speed in m/s.

By using the formulas given above and meteorological data of Kütahya province, the theoretical electricity generation values of the systems were calculated. Theoretical daily production values are shown in Figure 2. According to this; The annual theoretical electricity production value of the monocrystalline system was 7832 kWh, and the annual theoretical electricity production value of the polycrystalline system was 5324 kWh.

For the purpose of cost analysis of the system, the installation costs have been calculated. While calculating the costs, quotes were taken from various technology companies and average values were used. Cost parameters are shown in Table 5. According to this; The installation cost of the monocrystalline system was calculated as 107.800 TL, and the installation cost of the polycrystalline system was calculated as 106.000 TL.

The monthly average electricity consumption of the house and the monthly average electricity cost are shown in Table 6. While making the calculations, 1 month is accepted as 30 days. Consumption values of the products/items used in the residence were obtained from the catalog values of technological companies. While calculating the monthly electricity cost, cost calculations were made according to the Daytime (06:00 - 17:00), Peak (17:00 - 22:00) and Night (22:00 - 06:00) tariffs. Electricity tariff values are taken from the Energy Market Regulatory Authority (EPDK) [20]. While referencing electricity tariffs, tariffs were taken into account by EPDK for "Consumers receiving energy from the incumbent supply company" and calculations were made according to "Residential (8 kWh/day and below)" tariff values. A one-time tariff is offered to consumers by the electricity retail sales

company. In the province of Kütahya, the invoice created for a low-level electricity consumer was examined and the monthly electricity consumption cost was calculated separately.

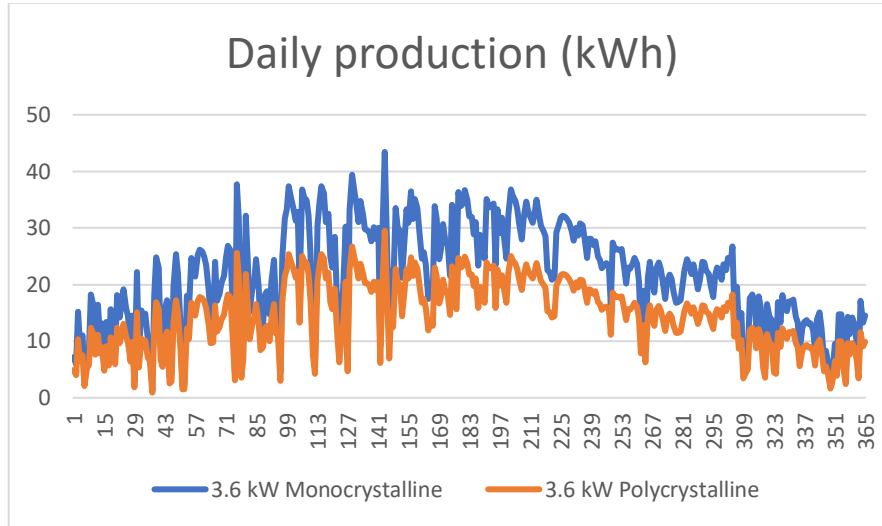


Fig. 2. Theoretical production values of the systems

Table 5. System cost parameters

Equipment	Unit	Cost (TL)
400 W Monocrystalline Panel	9	37,800
300 W Polycrystalline Panel	12	36,000
5000 W Off-Grid Inverter	1	12,000
12V 200Ah Gel Battery	6	39,000
Cable, Connector, Regulator		4,000
Other Costs		15,000
Total (Monocrystalline)		107,800
Total (Polycrystalline)		106,000

Table 6. Average monthly electricity consumption and electricity cost of the house

Product/Item	Power (W)	Monthly Consumption (kWh)			One-time tariff (kWh/month)
		Daytime (kWh/month)	Peak (kWh/month)	Night (kWh/month)	
Lighting	100		9	6	15
Computer	200	4.8	6	6	16.8
Dishwasher	1800	28.8			28.8
Refrigerator	45	14.85	6,75	10,8	32.4
Washing machine	650	10.4			10.4
Vacuum cleaner	800	6.4			6.4
Electric oven	2000	8			8
Microwave oven	700	5.25	5,25		10.5
Iron	2400	9.6			9.6
Television	75	6.75	6,75	4,5	18

Product/Item	Power (W)	Monthly Consumption (kWh)			
		Daytime (kWh/month)	Peak (kWh/month)	Night (kWh/month)	One-time tariff (kWh/month)
Other	250	7.5	7.5	7,5	22,5
Total (kWh/month)		102,35	41.25	34.8	178,4
Total (TL/month)		239,53	141.47	51.13	
Total (TL/month)		432.13			309.6

The payback period of the system can be calculated with the following equation, taking into account the future value of money;

$$I = \sum_{t=1}^{PP} A_t \cdot (1+i)^t \quad (4)$$

In this equation; I denotes the investment cost; PP refers to the payback period;  $A_t$  refers to annual profitability; i stands for the discount rate. According to the Central Bank of the Republic of Türkiye (TCMB) data for November, the payback periods of the systems are calculated as 3.45 years for the monocrystalline system and 3.38 years for the polycrystalline system [21]. Considering the consumption costs according to the one-time tariff, the payback period is calculated as 4,53 years for the polycrystalline system and 4,58 years for the monocrystalline system.

### 3. Findings and discussions

In this study, meeting the electricity need of a house in Kütahya province with photovoltaic panels was investigated. In the house, an off-grid 3.6 kW<sub>p</sub> system was considered, and a techno-economic analysis was carried out for monocrystalline and polycrystalline panel technologies.

By using the meteorological data of Kütahya, the annual theoretical electricity production values of the system were calculated. The annual theoretical electricity production value of the monocrystalline system was 7832 kWh, and the annual theoretical electricity production value of the polycrystalline system was 5324 kWh.

In addition, cost analysis of photovoltaic systems was carried out. The installation cost of the monocrystalline system was calculated as 107.800 TL, and the installation cost of the polycrystalline system was calculated as 106.000 TL. The payback periods of the systems were calculated as 3.45 years for the monocrystalline system and 3.38 years for the polycrystalline system.

### References

- [1] BP, *Statistical Review of World Energy*, 2020. <https://www.bp.com/content/dam/bp/business-sites/en/global/corporate/pdfs/energy-economics/statistical-review/bp-stats-review-2020-full-report.pdf> (accessed Dec. 10, 2020).
- [2] BP, *Statistical Review of World Energy 2021*, BP Energy Outlook 2021, **70**, 2021, p. 8–20.
- [3] EPDK, *EPDK | Enerji Piyasası Düzenleme Kurumu*, 2021. <https://www.epdk.gov.tr/Detay/Icerik/3-0-24/elektrikyllik-sektor-raporu> (accessed Jun. 08, 2021).

- [4] Yi L., Li G., Chen K., Liu Q. and Liu J., *Optimal scheduling of residential houses with optimal photovoltaic energy utilization strategy using improved multi-objective equilibrium optimizer algorithm*, Journal of Building Engineering, **59**, Nov. 2022, doi: 10.1016/j.jobbe.2022.105102.
- [5] Hyvönen J., Santasalo-Aarnio A., Syri S. and Lehtonen M., *Feasibility study of energy storage options for photovoltaic electricity generation in detached houses in Nordic climates*, J Energy Storage, **54**, Oct. 2022, doi: 10.1016/j.est.2022.105330.
- [6] Domingos R. M. A. and Pereira F. O. R., *Comparative cost-benefit analysis of the energy efficiency measures and photovoltaic generation in houses of social interest in Brazil*, Energy Build, **243**, Jul. 2021, doi: 10.1016/j.enbuild.2021.111013.
- [7] Muhammad-Sukki F., Ramirez-Iniguez R., Abu-Bakar S. H., McMeekin S. G. and Stewart B. G., *An evaluation of the installation of solar photovoltaic in residential houses in Malaysia: Past, present, and future*, Energy Policy, **39**, 12, 2011, p. 7975–7987, doi: 10.1016/j.enpol.2011.09.052.
- [8] Kijo-Kleczkowska A., Bruś P. and Więciorkowski G., *Profitability analysis of a photovoltaic installation - A case study*, Energy, **261**, Dec. 2022, doi: 10.1016/j.energy.2022.125310.
- [9] Karaca Ü. B. and Uçar S., *Konut Çatı ve Cephelelerinde Farklı Fotovoltaik Sistem Uygulamalarının Değerlendirilmesi*, Trakya University Journal of Engineering Sciences, **19**, 2, 2018, p. 65–76, [Online]. Available: <http://dergipark.gov.tr/tujes>
- [10] Çifci A., Kırbaş İ. and İşyarlar B., *Güneş Pili Kullanılarak Burdur'da Bir Evin Ortalama Elektrik İhtiyacının Karşıllanması*, Mehmet Akif Ersoy Üniversitesi Fen Bilimleri Enstitüsü Dergisi, **5**, 1, 2014, p. 14–17.
- [11] Adalı S. and Yalılı Kılıç M., *Eysel elektrik ihtiyacının hibrit yenilenebilir enerji sistemleriyle karşılanması: Bursa örneği*, Bilim. Derg. / NOHU J. Eng. Sci, **10**, 2, 2021, p. 520–526, doi: 10.28948/ngmuh.943002.
- [12] Öztürk M., Çırak Bozkurt B. and Özek N., *Eysel Fotovoltaik Sistemlerin Ömür Boyu Maliyet Analizi*, Pamukkale Üniversitesi Mühendislik Bilimleri Dergisi, **18**, 1, 2012, p. 1–11.
- [13] Yalılı Kılıç M., Dönmez T. and Adalı S., *Bursa ve Karaman İllerinde Konutlarda Güneş Enerji Potansiyelinin Uygulanabilirliğinin Araştırılması*, Uludağ University Journal of The Faculty of Engineering, **26**, 2, 2021, p. 421–432, doi: 10.17482/uumfd.952925.
- [14] Güngül M., Bayraç H. N. and Güllü M., *Türkiye'de Konutlarda Güneş Enerjisinden Elektrik Üretiminin TOPSIS Yöntemiyle Analizi*, Ulusal Çevre Bilimleri Araştırma Dergisi, **1**, 3, 2018, p. 133–144.
- [15] Kutlu N., *Isparta İlinde Bir Evin Elektrik İhtiyacını Karşılacak Panel Sayısı, Verimi ve Ekonomik Analizinin Hesabı*, Yalvaç Akademi Dergisi, **1**, 1, 2016, p. 41–52.
- [16] Ozgur M. A. and Köse G., *A technoeconomic analysis of solar photovoltaic power systems: Kütahya case study*, Energy Sources, Part A: Recovery, Utilization and Environmental Effects, **35**, 1, 2013, p. 42–57, doi: 10.1080/15567036.2010.523761.
- [17] Mevbis, *Meteoroloji Genel Müdürlüğü*. <https://mevbis.mgm.gov.tr/mevbis/ui/index.html#/Workspace> (accessed Jun. 16, 2021).
- [18] Mwanza M., *GÜNEŞ VE RÜZGÂR ENERJİSİ SANTRALLERİ İÇİN SÜRDÜRÜLEBİLİR SAHALARIN COĞRAFİ BİLGİ SİSTEMİ TABANLI ÇOK ÖLÇÜTLÜ KARAR ANALİZİ YÖNTEMİYLE BELİRLENMESİ*, Ege Üniversitesi, 2019.
- [19] Yolcan O. O., *Güneş Enerjisi Santralleri Saha Belirlenmesi ve Kütahya Örneği*, Doktora Tezi, Kütahya Dumlupınar Üniversitesi, Kütahya, 2022.
- [20] EPDK | Enerji Piyasası Düzenleme Kurumu, *Elektrik Tarifeleri*, <https://www.epdk.gov.tr/Detay/Icerik/3-1327/elektrik-faturalarina-esas-tarife-tabloları> (accessed Dec. 13, 2022).
- [21] TCMB, *TCMB - İstatistikler*, 2022. <https://www.tcmb.gov.tr/wps/wcm/connect/TR/TCMB+TR/Main+Menu/Istatistikler> (accessed Dec. 14, 2022).