



Technical Sciences
Academy of Romania
www.jesi.astr.ro

Journal of Engineering Sciences and Innovation

Volume 11, Issue 1 / 2026, pp. 1 - 10

<http://doi.org/10.56958/jesi.2026.11.1.1>

A. Mechanical Engineering

Received 22 September 2025

Accepted 11 March 2026

Received in revised form 04 December 2025

Development of the precessional transmissions from invention to applications

ION BOSTAN, ALEXANDRU BUGA*

Technical University of Moldova, Chisinau, Republic of Moldova

Abstract. This article presents theoretical and applied contributions regarding the development of teathed precessional transmissions with convex-concave multipair contact A^D_{CX-CV} . Is described the mathematical model of the A^D_{CX-CV} gearing and identifying the dependence of the contact geometry on the $[Z_g-\Theta, \pm 1]$ configuration parameters. Also, are presented the envelope equation of the arcs on the sphere with radius followed by the sequence of conjugation of flank profiles of the same pair of teeth in the k_i contacts with $(r_{ki}-r)$ characteristics depending on the y_{ki} precession angle in the A^D_{CX-CV} and $A^{D,b}_{CX-CV}$ gears. Are presented the dispersion of contact points and the evolution of the pressure angle between the flanks.

Keywords: development of precessional transmissions, mathematical model, the equation of the envelope, precession angle.

1. Introduction

This paper is original by the innovative solutions proposed for the constructive-functional development of precessional planetary transmission (*PPT*), by the complex approach of the problems and the concepts of development, as well as by the methods regarding their solution [1]. Also, include research in the thematic spectrum from structural concepts of *PPT* to theoretical and experimental approaches on physical models, from non-standardized forms of flank profiles of the teeth to the elaboration of their generation processes, from the constructive-functional design of different transmission to their industrial application, [2],[3]. The novelty of geometry development of the convex/concave flank profiles of the central wheel teeth, which ensures a concave/concave contact with a small difference of the radii of curvature and the reduction of the frictional sliding between the conjugated flanks, [4].

*Correspondence address: alexandru.buga@precesia.utm.md

2. Tooth profile expressed by the wrap of the circle arc family

For the tooth profile description of the central wheel is necessary to draw circular arcs with radius EG -red line, fig. 1.

The coordinates are transferred of the origin of the circular arc radius G into the mobile coordinate system $O\bar{X}\bar{Y}\bar{Z}$ linked to the central wheel according to the relations:

$$\begin{aligned}\bar{X}_G &= X_G \cos \psi_3 + Y_G \sin \psi_3, \\ \bar{Y}_G &= -X_G \sin \psi_3 + Y_G \cos \psi_3, \\ \bar{Z}_G &= Z_G\end{aligned}\quad (1)$$

where $\bar{X}_G, \bar{Y}_G, \bar{Z}_G$ are the coordinates of the origin of the circular arc radius of curvature G in the mobile coordinate system $O\bar{X}\bar{Y}\bar{Z}$, $\psi_3 = \psi_i/i$ – the rotation angle of the central wheel, i – the transmission ratio of the precessional transmission [5].

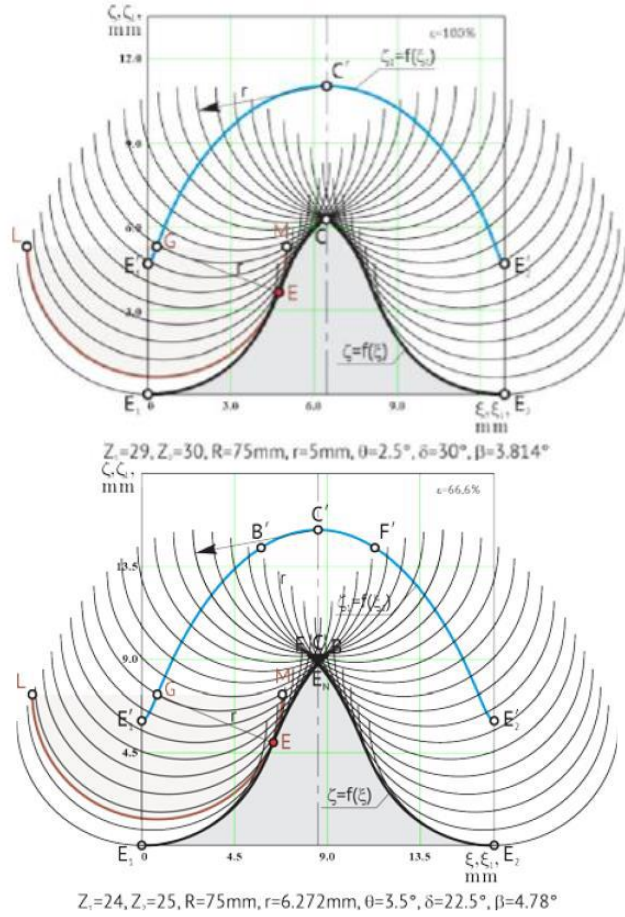


Fig. 1. Central wheel tooth profile described by the wrap of the family of circle arcs in the mesh with reference face contact ratio $\epsilon = 100\%$ (left picture) and $\epsilon < 66.6\%$ (right picture).

Equations (1) represent the developed trajectory of the motion of the origin G and the radius of the circular arc r on the sphere with radius R .

After that will represent the working surface of the flanks of the satellite teeth with a circular arc profile in conical form with the generator extensions intersecting at the precession center O (in normal section) in the mobile coordinate system $O\bar{X}\bar{Y}\bar{Z}$, using the condition from differential geometry:

$$re = r \cos \beta \text{ or } X\bar{X}_G + Y\bar{Y}_G + Z\bar{Z}_G = Rr \cos \beta, \quad (2)$$

where e is the unit vector along the axis of the toothed cone with a circular arc profile, β – the apex angle of the conical surface of the teeth with a circular arc profile, [6].

The equation of the envelope of the family of circular arcs LEM on the sphere with radius R by simultaneously solving the equations that describe the envelope of the family of flank surfaces of the satellite teeth with a circular arc profile:

$$\begin{aligned} \phi(X, Y, Z, \psi) &= XX_G + YY_G + ZZ_G - Rr \cos \beta = 0 \\ \frac{d\phi}{d\psi}(X, Y, Z, \psi) &= 0 \end{aligned} \quad (3)$$

and the equation of the sphere's surface:

$$X^2 + Y^2 + Z^2 - R^2 = 0. \quad (4)$$

For this, from equations (3) and (4) will write:

$$\begin{aligned} \frac{d\phi}{d\psi} &= X \frac{\partial \bar{X}_G}{\partial \psi} + Y \frac{\partial \bar{Y}_G}{\partial \psi} + Z \frac{\partial \bar{Z}_G}{\partial \psi}, \\ \frac{\partial \bar{X}_G}{\partial \psi} &= \frac{\partial X_G}{\partial \psi} \cos \psi_3 - \frac{X_G}{u} \sin \psi_3 + \frac{\partial \bar{Y}_G}{\partial \psi} \sin \psi_3 + \frac{Y_G}{u} \cos \psi_3, \\ \frac{\partial \bar{Y}_G}{\partial \psi} &= -\frac{\partial X_G}{\partial \psi} \sin \psi_3 - \frac{X_G}{u} \cos \psi_3 + \frac{\partial \bar{Y}_G}{\partial \psi} \cos \psi_3 - \frac{Y_G}{u} \sin \psi_3, \\ \frac{\partial \bar{Z}_G}{\partial \psi} &= \frac{\partial Z_G}{\partial \psi}, \\ \frac{\partial X_G}{\partial \psi} &= -R \cos \delta (1 - \cos \theta) \cos 2\psi - R \sin \delta \sin \theta \cos \psi, \\ \frac{\partial Y_G}{\partial \psi} &= -R \cos \delta (1 - \cos \theta) \cos 2\psi - R \sin \delta \sin \theta \cos \psi, \\ \frac{\partial Z_G}{\partial \psi} &= R \cos \delta \sin \theta \sin \psi \end{aligned} \quad (5)$$

After substituting (5) into (3) and (4), will obtain the envelope equations on the sphere:

$$\begin{aligned} X_i &= \frac{-(ab+de) \pm \sqrt{(ab+de)^2 + (1+a^2+d^2)(R^2-b^2-e^2)}}{1+a^2+d^2}, \\ Y_i &= aX_i + b, \\ Z_i &= dX_i + e, \end{aligned} \quad (6)$$

where:

$$a = \left(\bar{X}_G \frac{\partial \bar{Z}_G}{\partial \psi} - \bar{Z}_G \frac{\partial \bar{X}_G}{\partial \psi} \right) / \left(\bar{Z}_G \frac{\partial \bar{Y}_G}{\partial \psi} - \bar{Y}_G \frac{\partial \bar{Z}_G}{\partial \psi} \right),$$

$$b = \left(-R^2 \cos \beta \frac{\partial \bar{Z}_G}{\partial \psi} \right) / \left(\bar{Z}_G \frac{\partial \bar{Y}_G}{\partial \psi} - \bar{Y}_G \frac{\partial \bar{Z}_G}{\partial \psi} \right),$$

$$d = -\frac{(\bar{X}_G + a\bar{Y}_G)}{\bar{Z}_G},$$

$$e = \frac{R^2 \cos \beta - b\bar{Y}_G}{\bar{Z}_G}$$

Equations (6) represent the wrap of the family of circular arcs on the sphere and the profile of the central wheel teeth. To identify the profile of the central wheel teeth, in the normal section, will project the envelope from the sphere onto a plane P perpendicular to two directrices passing through two similar and adjacent points on the teeth profile on the sphere, for example through E'_1 and E'_2 respectively (fig.1).

The coordinates E'_1 and E'_2 can be expressed by:

$$\begin{aligned} X_{E_1} &= X_1 = X_i|_{\psi=0}, \\ Y_{E_1} &= Y_1 = Y_i|_{\psi=0} = -R \cos(\delta + \theta + \beta), \\ Z_{E_1} &= Z_1 = Z_i|_{\psi=0} = -R \cos(\delta + \theta + \beta), \\ X_2 &= X_2 = X_i|_{\psi=\frac{2\pi Z_2}{Z_1}}, \\ Y_{E_2} &= Y_2 = Y_i|_{\psi=\frac{2\pi Z_2}{Z_1}}, \\ Z_{E_2} &= Z_2 = Z_i|_{\psi=\frac{2\pi Z_2}{Z_1}} \end{aligned} \quad (7)$$

To project the envelope from the sphere, through points E_1 and E_2 , will draw a plane P_1 perpendicular to the directrices O_{E_1} and O_{E_2} [7]. The equation of this plane can be:

$$[E_1 E_2 \times E_1 E][O E_1 \times O E_2] = 0 \quad (8)$$

where E is an arbitrary point on plane P_1 .

Equation (8) is represented in the form:

$$\begin{vmatrix} i & j & k \\ X_2 - X_1 & Y_2 - Y_1 & Z_2 - Z_1 \\ X - X_1 & Y - Y_1 & Z - Z_1 \end{vmatrix} \begin{vmatrix} i & j & k \\ X_1 & Y_1 & Z_1 \\ X_2 & Y_2 & Z_2 \end{vmatrix} = 0 \quad (9)$$

or

$$A_1 X + B_2 Y + C_1 Z + D_1 = 0 \quad (10)$$

where:

$$\begin{aligned} A_1 &= (Z_2 - Z_1)(X_2 Z_1 - X_1 Z_2) - (Y_2 - Y_1)(X_1 Y_2 - X_2 Y_1), \\ B_1 &= (X_2 - X_1)(X_1 Y_2 - X_2 Y_1) - (Z_2 - Z_1)(Y_1 Z_2 - Z_1 Y_2), \\ C_1 &= (Y_2 - Y_1)(Y_1 Z_2 - Z_1 Y_2) - (X_2 - X_1)(Z_1 X_2 - X_1 Z_2), \\ D_1 &= -A_1 X_1 - B_1 Y_1 - C_1 Z_1. \end{aligned} \quad (11)$$

Next, using the rules of spherical trigonometry, will project the envelope expressed by equations (6) from the sphere onto plane P_1 , described by equation (10). For this, will identify the place of the intersection points of the family of lines passing through the precession center O and the points that form the envelope on the sphere [8].

$$Y = X \frac{Y_i}{X_i}, \quad Z = X \frac{Z_i}{X_i} \quad (12)$$
$$X_{iP} = -\frac{D_1 X_i}{A_1 X_i + B_1 X_i + C_1 Z_i}, Y_{iP} = X \frac{Y_i}{X_i}, Z_{iP} = X \frac{Z_i}{X_i}. \quad (13)$$
$$\begin{aligned} E_1 E_2 &= \sqrt{(X_2 - X_1)^2 + (Y_2 - Y_1)^2 + (Z_2 - Z_1)^2}, \\ E_1 E &= \sqrt{(X - X_1)^2 + (Y - Y_1)^2 + (Z_2 - Z_1)^2} = \sqrt{\xi^2 + \zeta^2}, \\ E_2 E &= \sqrt{(X - X_2)^2 + (Y - Y_2)^2 + (Z - Z_2)^2} = \sqrt{(E_1 E_2 - \xi)^2 + \zeta^2}, \end{aligned} \quad (14)$$

Fig. 2. Description of the central wheel tooth profile by the envelope of the family of circular arcs in the mobile coordinate system $O\bar{X}\bar{Y}\bar{Z}$.

Solving (14), will obtain the equations of the envelope of the family of circular arcs (fig. 2), projected in 2D onto plane P_1 , in ξ and ζ coordinates. The function $\xi = f(\zeta)$ expresses the envelope of the circular arc satellite tooth profiles and represents the profile of the central wheel teeth in normal section, defined by the expressions:

$$\begin{aligned} \xi &= \{(E_1 E_2)^2 + (X - X_1)^2 + (Y - Y_1)^2 + (Z - Z_1)^2 - (X - X_2)^2 + (Y - Y_2)^2 \\ &\quad + (Z - Z_2)^2\} (2E_1 E_2)^{-1}, \\ \zeta &= \sqrt{(X - X_1)^2 + (Y - Y_1)^2 + (Z - Z_1)^2 - \xi^2}. \end{aligned} \quad (15)$$

The contact point E of the satellite wheel teeth in a circle arc and the central wheel, for any angular position ψ of the crankshaft, is located at the distance of the radius r of the circle arc, on the normal at the velocity vector V_G of its origin at the point G , fig. 2 [10].

The profile of the central wheel teeth in the normal section is designed in the CAD/CAE/CAM-Catia modeling system V5R19. The principle of forming the wrap of the circle arcs family described with equation (15) with the placement of their radii origins [11] on the curve described with equations (1), represents the kinematic model of the processes $G_{r,s}$ of generation through spatial rolling of the central wheel teeth, with the reproduction of the geometry and kinematics of the interaction of the teeth from the real *PPT*.

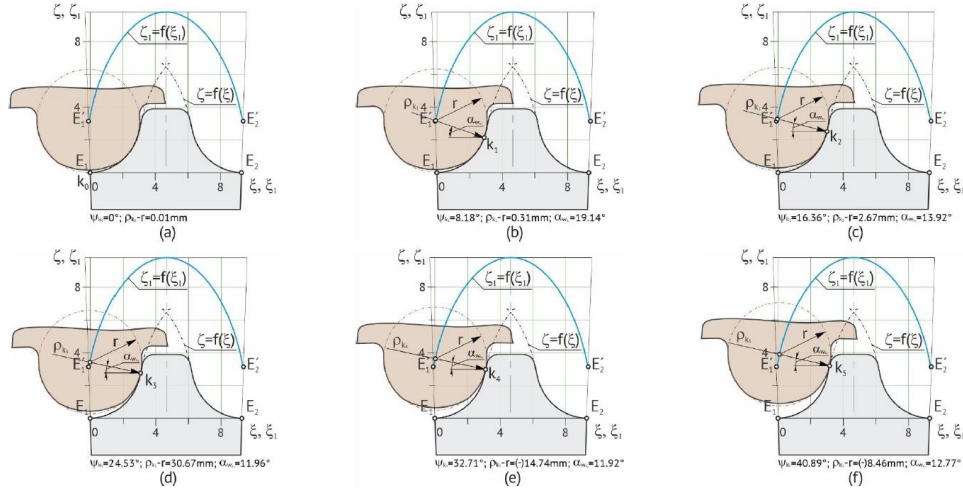


Fig. 3. The conjugation succession of the flank profiles of one and the same pair of teeth in contacts k_i with characteristics $\rho_{k1} - r$ and α_{wki} as a function of the precession angle ψ_H in the gear A_{CX-CV}^D : $Z_1 = 45, Z_2 = 46, R = 75 \text{ mm}, r = 3.14 \text{ mm}, \theta = 2.5^\circ, \delta = 22.5^\circ, \beta = 2.4^\circ$.

From the analysis of fig. 1, was find the convex-convex and convex-rectilinear contact are characteristic of the flank's conjugation with the trip area of the central wheel teeth [12]. Using this geometric aspect, it is possible to change the shape of the tooth, implicitly of the performance characteristics of the contact, by shortening its height to the level that would provide only one convex-concave contact (fig. 3). By changing the shape of the central wheel tooth by shortening its height (fig. 4, c, d) the teeth flanks conjugate in convex-concave contact at the limit at point k_i

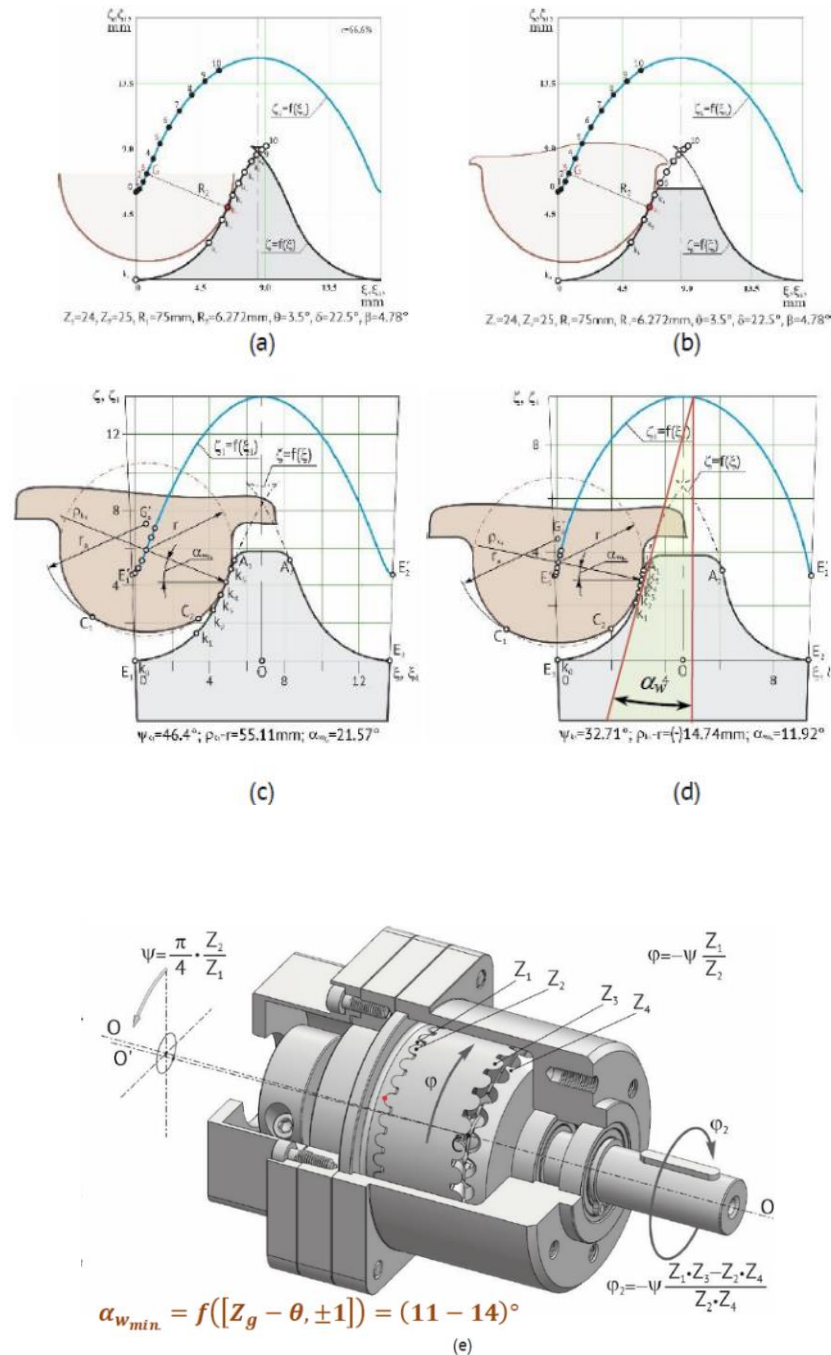


Fig. 4 Tooth shape modification a function of contact dispersion k_i : k_i contact points transposed onto the unmodified (a) and modified (b) central wheel tooth profile;
 (c), (d) - dispersion of contact points for one and the same pair of teeth as a function of ψ ;
 (e) - view of the multi-pair mesh A_{CX-CV}^D for the same ψ .

(fig.5) and in the area between it and the type of modified tooth, the flanks conjugate in convex-rectilinear contact. Therefore, depending on the modified height of the central wheel teeth and parametric configuration $[Z_g - \theta, \pm l]$, which would ensure the transformation of [13] the motion with constant transmission ratio, it's possible to provide single, bipartite, tripartite gearing etc. it's possible to intervene on the multiplicity of the gearing of the contact geometry and the kinetic-static of the teeth contact. Based on computer simulations on virtual models, it was found that at the variation of crankshaft precession angle $0^\circ < \psi < 37^\circ$, the convex-concave contact is provided in the pairs of teeth conjugated in the contacts k_0, k_1, k_2 and k_3 , shown in the unfolding of the teeth profiler [14] in the fig. 5. Thus, for gear with geometric parameters $Z_1=29, Z_2=30, R=75, r=5 \text{ mm}, \theta=2.5^\circ, \delta=30^\circ, \beta=3.8^\circ$.

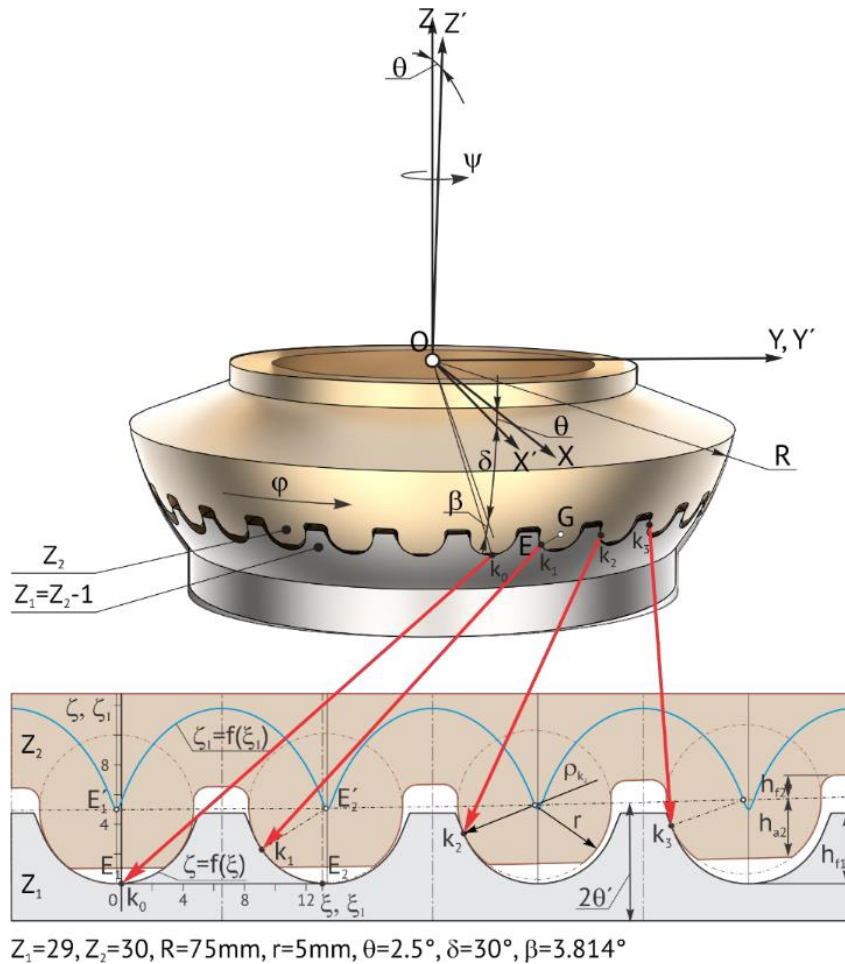


Fig. 5. 2K-H precessional gear with small difference of curvature in the contact of geared teeth with the multiplicity $e=27,5\%$.

Figure 6 presents dispersion of contact points k_i , at the same angular coordinate ψ of the crankshaft [15] in the gear A_{CX-CV}^D . Also, CAD model of A_{CX-CV}^D precessional planetary transmission,[16].

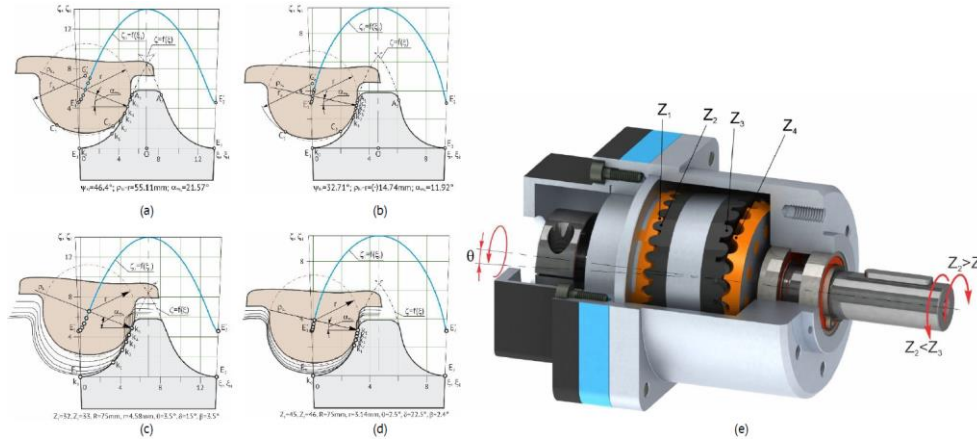


Fig. 6. Dispersion of contact points k_i , pressure angle α_w and positional succession of multi-pair conjugated tooth profiles in contacts $k_0 \dots k_j$ at the same angular coordinate ψ of the crankshaft in the gear A_{CX-CV}^D : (a), (c) $Z_1 = 32, Z_2 = 33, R = 75\text{mm}, r = 4.587\text{mm}, \theta = 3.5^\circ, \delta = 15^\circ, \beta = 3.5^\circ$; (b), (d) $Z_1 = 45, Z_2 = 46, R = 75\text{mm}, r = 3.14\text{mm}, \theta = 2.5^\circ, \delta = 22.5^\circ, \beta = 2.4^\circ$ and kinematic particularities of the transmission (e).

3. Conclusions

For the proper functioning of the A_{CX-CV}^D gear firstly must be identified the geometry of the contacts and secondly mathematical arguments of the contact geometry. For the tooth profile description of the central wheel is necessary to draw circular arcs with radius EG -red line, fig.1. The coordinates are transferred of the origin of the circular arc radius G into the mobile coordinate system $O\bar{X}\bar{Y}\bar{Z}$ linked, to the central wheel according to the relation (1).

Equations (6) represent the wrap of the family of circular arcs on the sphere and the profile of the central wheel teeth. To identify the profile of the central wheel teeth, in the normal section, will project the envelope from the sphere onto a plane P perpendicular to two directrices passing through two similar and adjacent points on the teeth profile on the sphere, for example through E'_1 and E'_2 respectively (fig.1). The contact point E of the satellite wheel teeth in a circle arc and the central wheel, for any angular position ψ of the crankshaft, is located at the distance of the radius r of the circle arc, on the normal at the velocity vector V_G of its origin at the point G , fig. 2.

The profile of the central wheel teeth in the normal section is designed in the CAD/CAE/CAM-Catia modeling system V5R19. The principle of forming the wrap of the circle arcs family described with equation (15) with the placement of their radii origins on the curve described with equations (1), represents the kinematic model of the processes $G_{r,s}$ of generation through spatial rolling of the

central wheel teeth, with the reproduction of the geometry and kinematics of the interaction of the teeth from the real *PPT*.

References

- [1] Bostan Ion, *Precessional Transmissions: Synthesis, Kinematics and Calculation Elements*, Chisinau, 2024, 461 p.
- [2] Bostan Ion, *Precessional Transmissions: Contact Geometry, Kinematics and Bearing*, Chisinau, 2024, 687 p.
- [3] Bostan Ion, *Precessional Transmissions: Surface generation and applications*, Chisinau, 2024, 571 p.
- [4] Buga Alexandru, Bostan Ion, Stoicev Petru, *Particularities of tribological behavior of the contact elements of the precessional gear, made of metallic and plastic materials*, International Conference on Modern Technologies in Industrial Engineering. Bucharest, Romania, June 14-17, 2023. Disponibile: DOI:10.54684/ijmmt.2023.15.3.16
- [5] Buga Alexandru, Postaru Gheorghe, Stoicev Petru, *Determination of the tribotechnical characteristics of the materials used for precessional transmissions design*, The 27th edition of Innovative Manufacturing Engineering and Energy International Conference, Chisinau, Republic of Moldova. 12-14 October 2023.
- [6] Buga Alexandru, Bostan Ion, Stoicev Petru, *Theoretical and experimental modelling of the tribological behavior of contact elements in the precessional gearing*, Journal of Engineering Science, **XXIX**, 2, 2022, p. 8-17.
- [7] Buga Alexandru, Bostan Ion, Stoicev Petru, *Theoretical Contributions on the selection of possible tribological couples of materials for the manufacture of precessional transmissions*, Journal of Engineering Science, **XXIX**, 1, 2022, p. 23-47. [https://doi.org/10.52326/jes.utm.2022.29\(1\).03](https://doi.org/10.52326/jes.utm.2022.29(1).03)
- [8] Bostan I., Mazuru S., Olevischi A., *Precessional Gear Tooth Machining Procedure*, MD 3532, C2, 31 March 2008.
- [9] Dyson A., Evans H.P., Snidle R.W., *Wildhaber-Novikov circular arc gear: Some properties of relevance to their design*, Proc. R. Soc. Lond. A Math. Phys. Sci., 425, 1989, p. 341–363.
- [10] Skoybeda A.T., Gromyko P.N., Khatetovskiy S.N., *Regarding to the Problem of Shaping the Gear Tooth Profile of Planetary Precession Gear Wheels*, NASB: Minsk, Belarus, 2001, p. 69–73. (In Russian).
- [11] Bostan I.A., *Creation of Planetary-Precessional Gears with Multi-Pair Gearing*, Ph.D. Thesis, Bauman Moscow State Technical University, Moscow, Russia, 1989. Volume 1, 511p., Volume 2 (App.), 236p. (In Russian).
- [12] Bostan I., *Planetary Precessional Transmissions: Synthesis and Generation Technologies*, Power Transmissions, Proceedings of the 4th International Conference, Sinaia, Romania, 20–30 June 2012, Springer, Berlin/Heidelberg, Germany, 2012, p. 21–42.
- [13] Bostan V., Bostan I., Vaculenco M., *Precessional Gear Transmission*, U.S. Patent 11, 913,523 B2, 27 February 2024.
- [14] Bostan I.A., *Precessional Transmissions with Multiple Pair Gear*, Știința: Chisinau, Moldova, 1991, 356 p. (In Russian)
- [15] Jasem M.A., Krauinsh P.Y., *Features of the Engagement of the Nutation Speed Reducer*, J. Adv. Electr. Devices MAT J., **4**, 2019, p. 27–32.
- [16] Novicov M.L., *Gears and Cam Mechanisms with Point Engagement System*, Patent SU 109113 A1, 19 April 1956. (In Russian).